

Product and selection

AXR 9718 TG-D

RC car steering / low-clearance mechanisms



Stall torque

23 kg·cm

No-load speed

0.042 s/60°

Comparison voltage

8.4 V

Low-profile housings suit chassis with limited installation height. Fast steering depends on servo speed, tyre loads, steering geometry and voltage drop together. Verify spline, arm and receiver-signal compatibility, and set travel limits to prevent the linkage from holding the servo stalled.

Performance by voltage

Comparison voltage (V)	Stall torque (kg·cm)	No-load speed (s/60°)	Running current (A)	Stall current (A)
5	13	0.07	0.2	2.3
6	16	No data at this test point	0.26	2.9
7.4	20	0.049	0.38	3.4
8.4	23	0.042	0.46	3.6

Stall torque is not a continuous load rating. Consider rated torque and duty cycle when sizing the mechanism. The operating range specifies allowable supply voltage; it does not imply that test data exist at every voltage.


Mechanical and control specifications

Operating voltage	4.8 - 8.4 V
Rated torque	7.5 kg·cm @ 8.4 V
Dimensions	42.2 × 20 × 27 mm
Weight	60.2 g
Motor type	Brushless motor
Gear material	Metal gears
Bearing count	2
Lead length	300 mm
Control signal	PWM
Operating frequency	333 Hz
Reference pulse width	1520 µs
Pulse width and angle	500 / 1500 / 2500 µs → -90 / 0 / 90°

The source lists a 1520 µs reference pulse and a 1500 µs position centre. Confirm the neutral setting and usable travel for the controller and delivered version.

The source speed value at 6 V requires clarification and is not displayed. Values at other voltages follow the source table.

Mounting dimensions

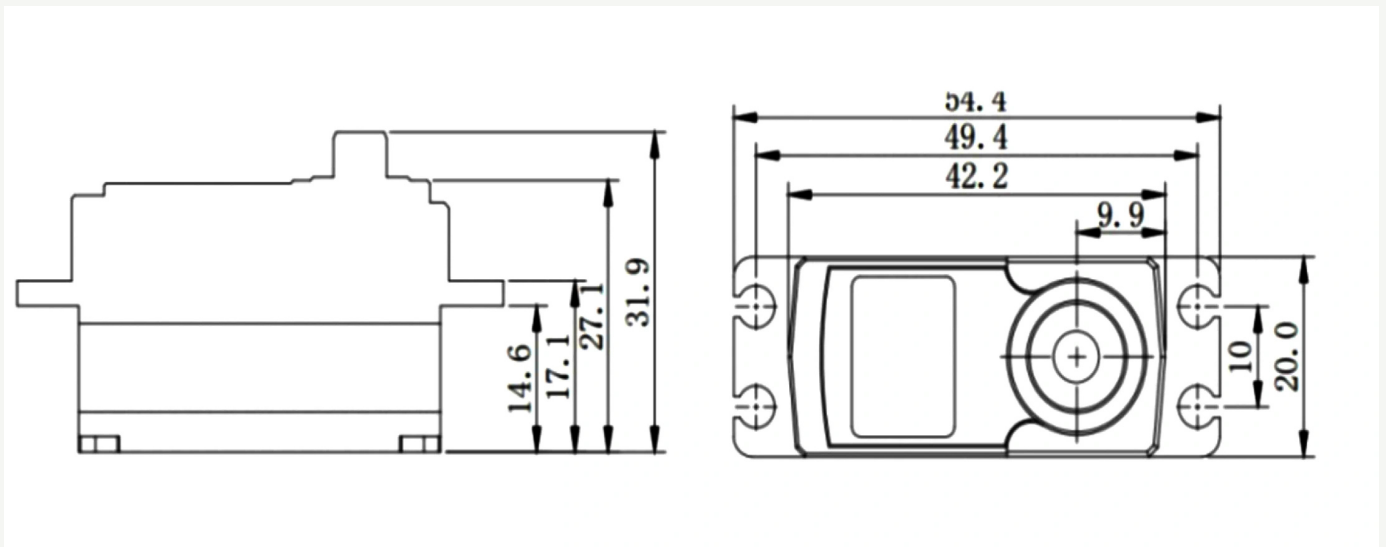

Drawing and tabulated dimensions may use different datums. Confirm the final mounting drawing and interface version before machining mating parts.

Installation and integration

Check the supply, pulse width, mounting pattern and arm connection first. Commission with the load removed or limited, verify centre position, direction and mechanical travel, then validate the working load gradually. Allow for transient current and prevent voltage drop, reversed connections and sustained contact with mechanical stops.

Specifications: AXR 2026 product documentation, organised by test voltage. · AXR 2026 · Source catalog page 55

<https://axrsystems.com/en/products/axr-9718-tg-d/>

Business enquiries

Product selection · Project enquiries · Technical support

AXR 9718 TG-D



Zhuhai SV Tech Co. Ltd.

ADDRESS 35 Jinzhou Road, Jinding, Xiangzhou District, Zhuhai, Guangdong, China

CONTACT **Mr. Liu**

PHONE **+86 18688194199**

EMAIL **lhc1983@gmail.com**