

H5

High-voltage brushless motor



INPUT VOLTAGE

400-500 V DC

RATED INPUT

7A

MOTOR MASS

1200±10g

Quality engineering. Service life up to 5000 hours.

Actual life depends on load, temperature, installation and maintenance.

01 / SPECIFICATIONS

Specifications and scope

For brushless motor systems with 400-500 V DC input. This manual provides product, installation and operating guidance.

No.	Parameter	Specification
01	Rated voltage	500V
02	Rated input current	7A
03	No-load current (200V)	0.4A
04	Maximum current	15.3A±0.2A
05	Internal resistance (temperature-dependent)	1.1Ω±0.1Ω
06	Motor mass	1200±10g
07	Rotation (shaft-end view)	CW / CCW
08	Operating temperature	-10 °C-65 °C
09	Storage temperature	-10 °C-50 °C
10	Storage humidity	≤85%

Test and inspection conditions


Ambient test temperature: 25 ± 5 °C. Temperature rise: ≤65 °C. No-load vibration velocity: ≤1.8 mm/s.

Dielectric test: source notation DC1000 / 5S / 5mA, between winding and housing, with no flashover.


Factory checks cover supply specification, no-load current, maximum current and resistance. Rated current is sample-tested on a dynamometer; mass is sample-checked with a scale.

02 / INSTALLATION

Dimensions and wiring

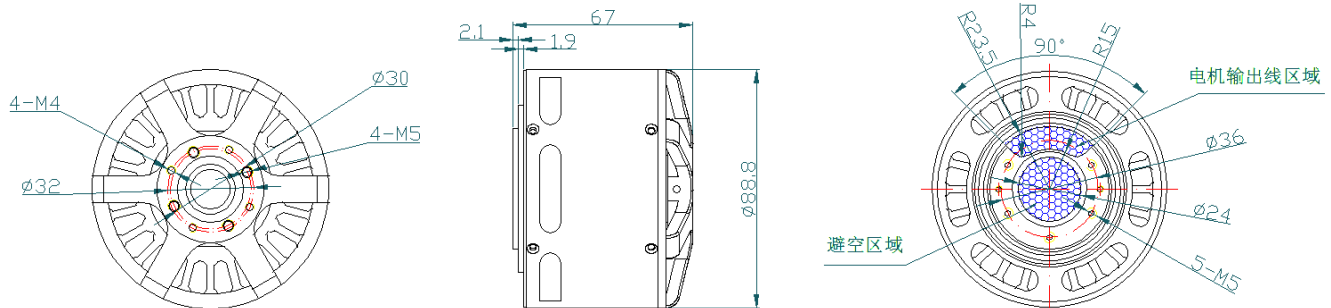


Mounting holes, outline and shaft dimensions are shown above. Dimensions and symbols follow the original drawing.

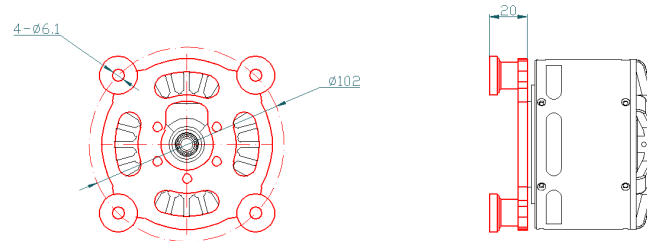

Optional base and accessories; inclusion depends on the confirmed configuration.

Changing rotation direction

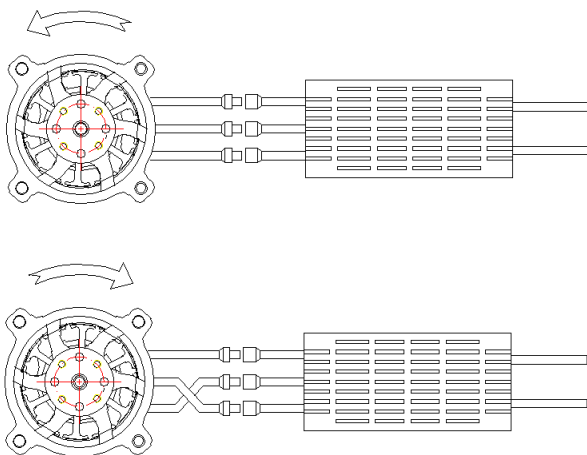

1. Confirm the rotation required by the propeller.
2. Leave the propeller off and connect the three motor phase leads to the ESC outputs.
3. Check rotation safely. To reverse it, isolate power, then exchange any two phase leads.
4. Install the propeller only after confirming the direction.

03 / PERFORMANCE 01

500 V / folding propeller

Source speed entry: 6750 rpm | Propeller: 32 (folding) | Test voltage: 500 V

No.	Voltage / V	Current / A	Input / W	Thrust / g	Thrust eff. / g/W
1	500	1.08	540	6230	11.54
2	500	1.60	800	8100	10.13
3	500	2.23	1115	10300	9.24
4	500	2.77	1385	12200	8.81
5	500	3.49	1745	14420	8.26
6	500	4.08	2040	16230	7.96
7	500	4.67	2335	18110	7.76
8	500	5.48	2740	20130	7.35
9	500	6.27	3135	21800	6.95
10	500	7.53	3765	23930	6.36
11	500	9.00	4500	26400	5.87
12	500	10.68	5340	29700	5.56
13	500	12.03	6015	32180	5.35
14	500	14.1	7050	35230	5.00
15	500	15.3	7650	36800	4.81


Test data are retained row by row from the source. The curve plots the listed input power and thrust. Test points do not establish continuous-duty ratings. Propeller notation follows the source.

03 / PERFORMANCE 02

450 V / folding propeller

Source speed entry: 6070 rpm | Propeller: 32 (folding) | Test voltage: 450 V

No.	Voltage / V	Current / A	Input / W	Thrust / g	Thrust eff. / g/W
1	450	1.2	540	6220	11.52
2	450	1.8	810	8110	10.01
3	450	2.5	1125	10280	9.14
4	450	3.1	1395	12170	8.72
5	450	3.9	1755	14370	8.19
6	450	4.6	2070	16190	7.82
7	450	5.2	2340	18080	7.73
8	450	6.1	2745	20030	7.30
9	450	7	3150	21740	6.90
10	450	8.4	3780	23900	6.32
11	450	10	4500	26370	5.86
12	450	11.9	5355	29650	5.54
13	450	13.4	6030	32150	5.33

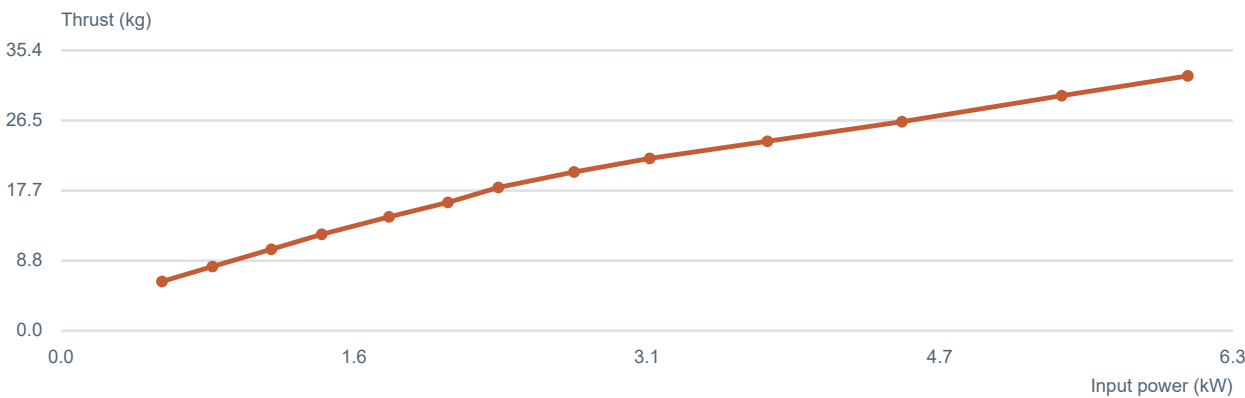

Test data are retained row by row from the source. The curve plots the listed input power and thrust. Test points do not establish continuous-duty ratings. Propeller notation follows the source.

04 / OPERATION & CARE

Safety, operation and care

Installation, wiring and commissioning require competent personnel. Isolate power and confirm safe discharge before changing connections.

- 01** Supply voltage, service life and environmental conditions can lead to short circuits, fire or smoke. Provide appropriate electrical protection and guarding in the complete system. Stop use and contact technical support if safety is in doubt.
- 02** Do not damage windings, leads, edges or insulation during installation and wiring. Damage can cause electric shock, burnout or fire. Never touch rotating parts while energized.
- 03** This motor is intended for integration into other equipment. It does not carry a complete set of machine-level warning labels. The integrator must provide the necessary labels and guarding.
- 04** Keep the worst-case bearing temperature below the allowable upper limit of 100 °C. If it cannot be measured, verify service life in the complete system. Do not maintain a locked rotor or sustained high bearing temperature.
- 05** For custom speed control, verify the voltage range, load variation and control strategy. Check for abnormal noise, overheating and stalling.
- 06** Mount the motor correctly. Incorrect mounting can cause noise and vibration and shorten bearing life.
- 07** Do not lift or carry the motor by its leads or shaft. After a drop or equivalent impact, stop use and inspect for insulation and bearing damage.
- 08** Do not disassemble the motor. Safety and other performance are not assured after unauthorized disassembly.
- 09** Avoid corrosive or harmful gases and substances. The source lists H₂O, SO₂, NO₂, Cl₂, and silicone-, cyano- and phenol-based substances. Check compatibility with materials and conditions inside the complete machine to prevent corrosion and reduced life.
- 10** Store away from harmful gases at -10 to 50 °C and no more than 85% relative humidity. The source specifies sealed storage for up to six months under normal temperature and humidity conditions.

05 / TECHNICAL SUPPORT

Specification notes and support

- 01** The integrator must confirm compatibility with the complete machine in structure, dimensions, service life, noise, vibration and performance.
- 02** Operation outside the specified limits is outside the original specification guarantee.
- 03** Contact technical support before changing the machine specification or using the motor in another product.
- 04** Specification changes affecting performance or characteristics require samples and verification against mutually confirmed documents before implementation.
- 05** Components may be adjusted for performance improvements while meeting agreed specifications. Record critical delivery requirements in the mutually confirmed documents.
- 06** Agree in advance on any necessary requirements not addressed in this manual.
- 07** Resolve compatibility issues by mutual agreement using the confirmed specification documents as the basis.

Source-data verification notes

The source also lists 6750 / 6070 rpm without defining the operating condition. These are retained with their respective test voltages.

Business enquiries

Product selection · Project enquiries · Technical support

H5



Zhuhai Shuangjie Technology Co., Ltd.

ADDRESS

35 Jinzhou Road, Jinding, Xiangzhou District, Zhuhai, Guangdong, China

CONTACT

Mr. Liu

PHONE

+86 18688194199

EMAIL

lh1983@gmail.com

Quality engineering. Service life up to 5000 hours.

Actual life depends on load, temperature, installation and maintenance.